
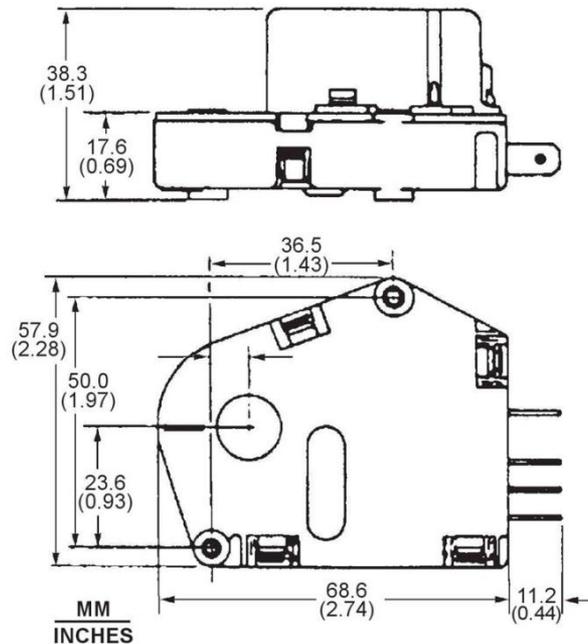


2000/3000シリーズ デフロストタイマー

電源電圧	208~240VAC、100~120VAC 50/60Hz
消費電力	1/4W or 2W
電気定格	1/3 or 1/2HP、208~240V 10 or 15A、120V 5A、208~240V
使用周囲温度	0~65°C
認証規格	UL、CSA、EN60730
端子形状	#187リセプタクル

STANDARD Duration of Switch Transfer in minutes			
CYCLE	MINIMUM	MAXIMUM	TOLERANCE
1 Hour	2,0	8,0	± 1,0
2 Hours	2,0	8,0	± 1,0
4 Hours	7,0	32,0	± 3,0
5 Hours	8,0	40,0	± 3,0
6 Hours	10,0	48,0	± 3,0
8 Hours	7,0	64,0	± 3,0 and ± 4,0
10 Hours	8,0	80,0	± 3,0 and ± 5,0
12 Hours	10,0	96,0	± 3,0 and ± 5,0
16 Hours	14,0	64,0	± 4,0
24 Hours	20,0	96,0	± 5,0

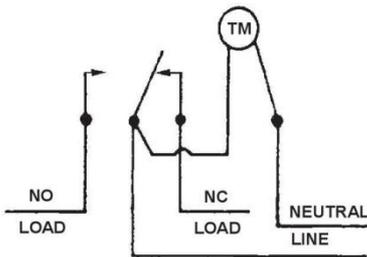

用途：
冷蔵庫、冷凍機用の霜取りタイマー

